



Nintendo Wii Remote Sensor Screen Replacement

This guide will teach you how to install a new sensor screen on your Wii remote.

Written By: Emily





TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Y1 Tri-wing Screwdriver](#) (1)
-

Step 1 — Front Cover Plate and Batteries



- Flip the Wii Remote over so the battery cover faces you.
- Push up on the bottom tab.
- Remove the battery cover.

Step 2




- Remove the first battery by pressing down on the positive end and pulling the battery out.
- Remove the second battery by pushing up on the positive end and pulling the battery out.

Step 3



- Using a Tri-wing Y1 Screwdriver, remove the two center 7mm screws by turning them counterclockwise.
- Repeat with the two bottom screws.

Step 4

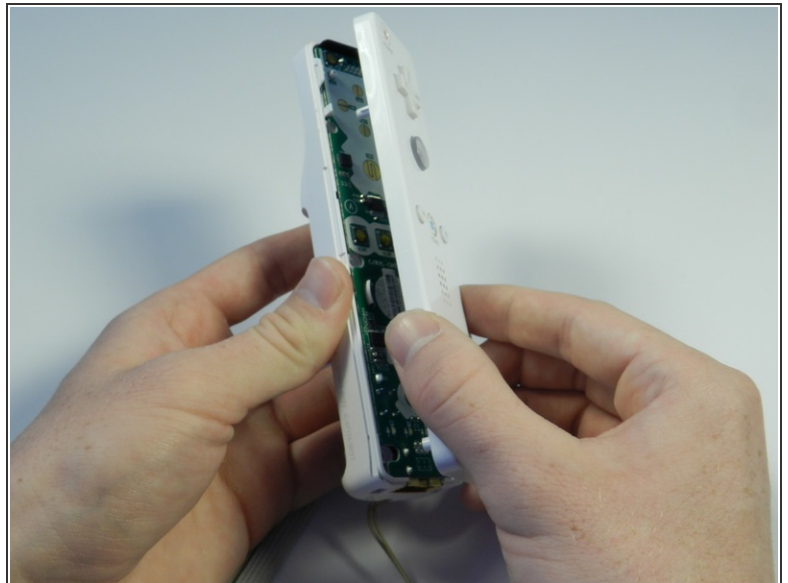

- With the flat end of a spudger, gently apply pressure to the tabs located on left side of the controller.
 - ⓘ These tabs are breakable. However, if the tabs are broken the controller will still function.
 - Open the front plate like a book.
- ⚠ Small parts may fall out as you open the front plate.

Step 5 — Sensor Screen



- Tilt the remote, without the front cover plate, upward so the handle strap is at the bottom and the black screen is facing you.
- Grip the outward edge of the screen with your fingers.
- Gently, pull the screen straight outward from its housing. The screen will slide directly out.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-20 06:55:25 AM.